



ASX RELEASE

27 June 2014

Investment Summary

- ASX listed African-focused resources company (ASX:GBE)
- 100% interest held on projects in Malawi including niobium, graphite and rare earths
- Malawi Kanyika Niobium project in feasibility optimisation

Directors and Management

Non-Executive Chairperson

Ms Alice Wong

Managing Director

Mr Alistair Stephens

Executive Director & Deputy CEO

Ms Shasha Lu

Non-Executive Director

Mr Jingbin Tian

Independent Non-executive Director

Mr William Hayden

Mr Bo Tan

Mr Alex Ko

CFO & Company Secretary

Ms Kerry Angel

FPOS 469,729,062

OPTIONS 9,450,000 (various)

GBEAQ 3M Rights expire June 2014

Contact

Alistair Stephens

Managing Director

info@globemm.com

T: +61 08 9327 0700

Chiziro Graphite Project Update

Globe Metals & Mining (“Globe” or “the Company”; ASX:GBE) has completed a mapping and rock chip sampling programme at the Chimutu Prospect within the Chiziro Graphite Project, situated northeast of Lilongwe in Malawi.

Highlights

- **The assays of the 40 rock chip samples collected during the exploration programme conducted during March and April 2014 have been completed and the results are considered encouraging**
- **22 of the 40 samples assayed greater than 10% Total Graphitic Carbon (TGC) with one sample assaying a high of 52.5% TGC**
- **An estimated 5,600 metres of trenching is planned for the Main and Musinda Trends.**

Table 1 below summarises the results of 40 samples, of which 22 samples assayed greater than 10% Total Graphitic Carbon (TGC) with one sample assaying a high of 52.5% TGC. The rock chip sampling and geological mapping identifies graphite mineralisation over a strike length of greater than 5 kilometres within two merging trends (the Main and Musinda – refer Figure 2).

Table 1: Summary of rock chip samples collected during the Chimutu Prospect mapping programme.

Assay Range (% TGC)	No of Samples
0 - 2	0
2 - 5	2
5 - 10	16
10 - 20	20
>20	2
Total	40

Globe holds an exploration project called Chiziro located in the north east of the city of Lilongwe in Malawi that is prospective for graphite mineralisation (Figure 1). Within this project Globe has identified graphite mineralisation at the Chimutu prospect.

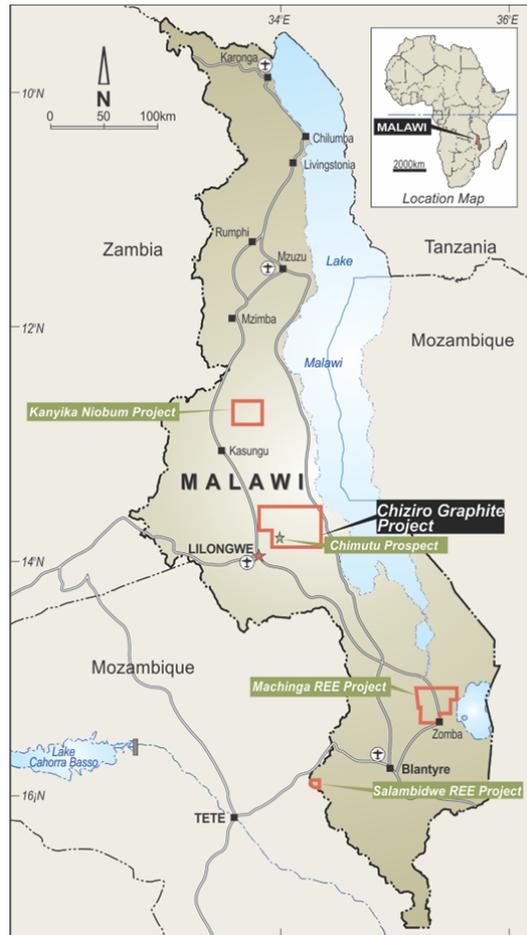


Figure 1: Map showing location of the Chiziro Graphite Project in Malawi

In the March Quarterly Report, Globe advised that a review of all previous surface sampling program was completed as part of exploration plans for the June Quarter. Several targets were identified and a trenching program is planned to commence once the wet season is over. One of the areas selected is the Chimutu Prospect where mapping identified significant graphite over a strike length of 5 kilometres.

The following updates shareholders on the status of the exploration activities.

At the Chimutu Prospect, two converging broad zones of graphite bearing zones have been defined, one approximately seven kilometres in length (referred to as the Main Zone) and the other approximately two kilometres in length (referred to as the Musinda Zone) (refer Figure 2). Individual graphite zones vary from several metres to over 50 metres in width.

Based on the geological mapping and the initial encouraging rock chip sampling results, a broad spaced trenching programme has been planned for the Chimutu area, testing the indicated strike length of

graphite mineralisation. An estimated 5,600 metres of trenching is planned for the Main and Musinda Trends (refer Figure 2) to define the nature of graphite mineralisation over a 4 kilometre extent.

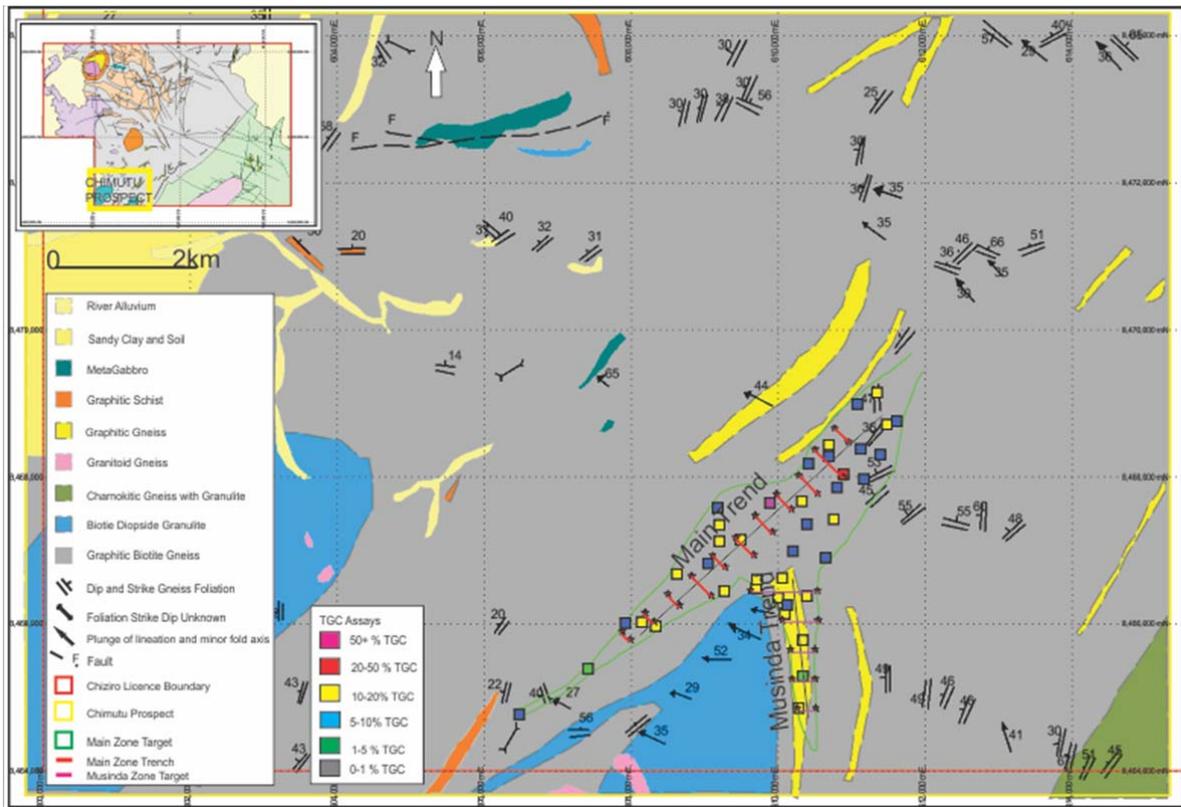


Figure 2: Location plan of the Chimutu Prospect showing rock chip sample locations and planned trenching

ENDS

Competent Person: The information in this report that relates to Exploration Targets, Exploration Results, Mineral Resources or Ore Reserves is based on information compiled by Fergus Jockel, a competent person who is a Member of The Australasian Institute of Mining and Metallurgy and the Australian Institute of Geoscientists. Fergus Jockel is a full-time employee of the company and has sufficient experience that is relevant to the style of mineralisation and type of deposit under consideration and to the activity being undertaken to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Fergus Jockel consents to the inclusion in the report of matters based on his information in the form and context in which it appears.

JORC TABLE 1

Section 1 Sampling Techniques and Data

Criteria	Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where ‘industry standard’ work has been done this would be relatively simple (eg ‘reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay’). In other cases more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Rock chip samples were collected by Globe Metals and Mining Ltd where suitable outcrop was identified. Samples were collected for TGC analysis at the Bureau Veritas Inspectorate Laboratories Pty Ltd (BV) in Rustenburg South Africa. Sampling points were selected to ensure representation of fresh rock and saprock. Approximately 2kg samples were collected. Bagging and numbering were done in the field to ensure integrity of the sampling process. Sample preparation was carried out by BV. The samples were acidified and roasted to remove carbonate and organic carbon. The residual carbon was determined by using a total combustion analyser.
Drilling techniques	<ul style="list-style-type: none"> Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> No drilling has been done to date
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> No drilling has been done to date
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support 	<ul style="list-style-type: none"> All rock chip samples were geologically logged following Globe Metals and Mining procedures.

	<p>appropriate Mineral Resource estimation, mining studies and metallurgical studies.</p> <ul style="list-style-type: none"> • Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. • The total length and percentage of the relevant intersections logged. 	
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> • If core, whether cut or sawn and whether quarter, half or all core taken. • If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. • For all sample types, the nature, quality and appropriateness of the sample preparation technique. • Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples. • Measures taken to ensure that the sampling is representative of the in situ material collected, including for instance results for field duplicate/second-half sampling. • Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> • At BV the samples were sorted, dried and weighed. Primary preparation involved crushing the whole sample. Sample splitting was done through a riffle splitter to obtain a sub-fraction later pulverised in a vibrating pulveriser.
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> • The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. • For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc. • Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (ie lack of bias) and precision have been established. 	<ul style="list-style-type: none"> • All Rock chip samples were assayed TGC analysis at the Bureau Veritas Inspectorate Laboratories Pty Ltd in South Africa. • Internal Laboratory Standards and Repeats were performed on the batch of 40 samples. • Quality control procedures adopted by BV are considered to be adequate.
Verification of sampling and assaying	<ul style="list-style-type: none"> • The verification of significant intersections by either independent or alternative company personnel. • The use of twinned holes. • Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. • Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> • Globe Metal and Mining geologist verified all samples prior to dispatch to the laboratory. • Documentation of samples is initially collected in notebooks and location stored in hand held GPS units before being transferred to electronic format.
Location of data points	<ul style="list-style-type: none"> • Accuracy and quality of surveys used to locate drill holes (collar and down-hole 	<ul style="list-style-type: none"> • Hand held GPS units (GARMIN GPSMAP 78s) are used to define field location of

	<p>surveys), trenches, mine workings and other locations used in Mineral Resource estimation.</p> <ul style="list-style-type: none"> • Specification of the grid system used. • Quality and adequacy of topographic control. 	<p>rock chop samples. These locations are considered accurate to 5m. The GPS has sufficient topographic control warranted for rock chip sampling. GPS data is downloaded via MAP SOURCE into MS Excel.</p>
Data spacing and distribution	<ul style="list-style-type: none"> • Data spacing for reporting of Exploration Results. • Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. • Whether sample compositing has been applied. 	<ul style="list-style-type: none"> • Sample locations were selected after geological mapping to ensure the nature of graphite mineralisation encountered during mapping was represented.
Orientation of data in relation to geological structure	<ul style="list-style-type: none"> • Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. • If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material. 	<ul style="list-style-type: none"> • Structure unknown from rock chip sampling.
Sample security	<ul style="list-style-type: none"> • The measures taken to ensure sample security. 	<ul style="list-style-type: none"> • Chain of custody for Globe Metal and Mining rock chip samples was managed in the field by the geology manager. Samples were collected from the Lilongwe office in Malawi by MANICA (freight company in Malawi) for delivery to Bureau Vertias in South Africa
Audits or reviews	<ul style="list-style-type: none"> • The results of any audits or reviews of sampling techniques and data. 	<ul style="list-style-type: none"> • No audit of data has been completed to date

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	Explanation	Commentary
Mineral tenement and land tenure status	<ul style="list-style-type: none"> • Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings. • The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area. 	<p><u>Chiziro Graphite Project</u></p> <ul style="list-style-type: none"> • Exploration is conducted within EPL0299/10 which is 100% held by Globe Metals and Mining Ltd. The EPL covers an area of 2,050km². • The tenement is in good standing and no known impediments exist.

<p>Exploration done by other parties</p>	<ul style="list-style-type: none"> • Acknowledgment and appraisal of exploration by other parties. 	<ul style="list-style-type: none"> • The previous licence holder - Fergie Minerals and Metals Ltd - did not carry out any geological work. All exploration work to date has been conducted by Globe Metals and Mining Ltd only.
<p>Geology</p>	<ul style="list-style-type: none"> • Deposit type, geological setting and style of mineralisation. 	<ul style="list-style-type: none"> • The licence area is underlain by gneisses, schists and granulites which belong to the Basement Complex, and forming part of the Malawi Province of the Mozambique belt. Graphitic granulites and graphitic schists have been mapped throughout the licence area. This basement package was intruded by pegmatite bodies (dykes and sills). Metamorphosed mafic and ultramafic rocks have been observed in very few areas. Field evidence has supported that the basement rocks were subjected to upper amphibolite metamorphism as well as granulite facies conditions in several localities. In some areas the rocks are well exposed but for the most part they are covered by thick surficial deposits including residual soils, alluvium and colluvium which are believed to have formed due to prolonged weathering since mid-Tertiary. • The basement rocks are complexly deformed but the pegmatite bodies are massive and undeformed.
<p>Drill hole Information</p>	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes: <ul style="list-style-type: none"> • easting and northing of the drill hole collar • elevation or RL (Reduced Level – elevation above sea level in metres) of the drill hole collar • dip and azimuth of the hole • down hole length and interception depth • hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should 	<ul style="list-style-type: none"> • No drilling has been done to date.

	clearly explain why this is the case.	
Data aggregation methods	<ul style="list-style-type: none"> In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated. Where aggregate intercepts incorporate short lengths of high grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> The results shown are per sample and are not weighed averages. No cut off grades have been applied to the results
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> These relationships are particularly important in the reporting of Exploration Results. If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported. If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known'). 	<ul style="list-style-type: none"> No drilling has been conducted and results are from rock chip samples.
Diagrams	<ul style="list-style-type: none"> Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> Appropriate maps are included in the body of the report
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> Reporting of results in this report is considered balanced. All results have been reported
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Refer to body of text.
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). 	<ul style="list-style-type: none"> A trenching program is designed and planned for Chimu as a follow up of the geological mapping and rock chip sampling programs. Appropriate

	<ul style="list-style-type: none"> Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<p>diagrams are in the body of the report.</p>
--	---	--

Contact:

Alistair Stephens

Managing Director
 Globe Metals & Mining Ltd
 Tel: +61 (0) 8 9327 0700

Shasha Lu

Deputy CEO and Executive Director
 Globe Metals & Mining Ltd
 Tel: +61 (0) 8 9327 0700

About Globe Metals & Mining

Globe is a resources company with a strategy to grow the company’s global investment opportunities in the minerals industry.

Globe’s principle project is the Kanyika Niobium Project is located in Malawi, which will produce niobium and tantalum products; key additives in steels and electronics.

Globe’s corporate head office in Perth, Australia is supported by a regional operational office in Lilongwe, Malawi.
